


MMC ELECTRIC COMPANY PVT. LTD.

Admin. Off.: 109 / C, Sanjay Building No. 5, Mittal Estate, Sir M. V. Road, Andheri (E), Mumbai - 400 059, India
 Tel. +91-22-6692 0902 / 6692 0903 • Fax: +91-22-40260904 • e-mail: sales@dynafluxindia.com • Website: www.dynafluxindia.com

DYNAFLUX D63 SERIES P. M. DC MOTORS

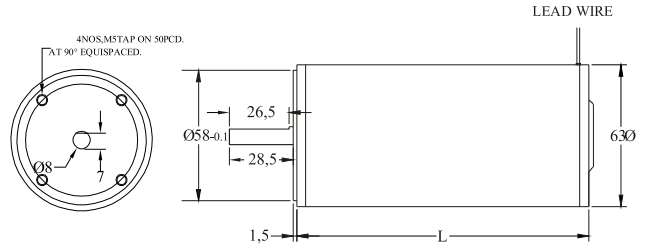


SPECIFICATIONS									
POWER IN WATTS/HP	SPEED IN RPM	VOLTS. IN DC		CURR. IN AMPS		TORQUE IN KG-CM	ENCL.	L mm	WEIGHT (KG)
		V1	V2	A1	A2				
25/0.03	1500	12	24	2.6	1.3	1.6	TENV	96	1.2
25/0.03	3000	12	24	2.6	1.3	0.8	TENV	96	

SPECIFICATIONS									
POWER IN WATTS/HP	SPEED IN RPM	VOLTS. IN DC		CURR. IN AMPS		TORQUE IN KG-CM	ENCL.	L mm	WEIGHT (KG)
		V1	V2	A1	A2				
50/0.06	1500	12	24	5.2	2.6	3.2	TENV	130	1.6
50/0.06	3000	12	24	5.2	2.6	1.6	TENV	130	

DYNAFLUX D63 SERIES INLINE GEARED P. M. DC MOTORS

FLANGE MOUNTING.

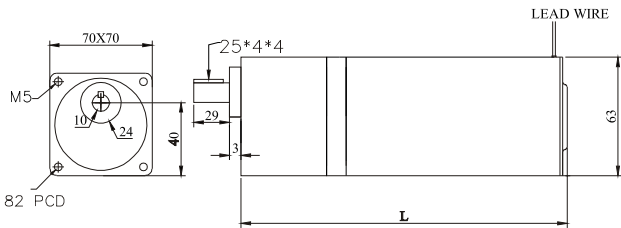


SPECIFICATIONS																						
POWER IN WATTS/HP	SPEED IN RPM	VOLTS. IN DC		CURR. IN AMP		RATIO				O/P SPEED IN RPM				TORQUE IN KG-CM				INSL. CLASS	DUTY CYCLE	PROTE. CTION	L mm	WEIGHT (KG)
		V1	V2	A1	A2	R1	R2	R3	R4	S1	S2	S3	S4	T1	T2	T3	T4					
25/0.03	1500	12	24	2.6	1.3	5	10	30	180	300	150	50	8	3	5	13	25	B	S1	IP44	131	1.5
50/0.06	1500	12	24	5.2	2.6	5	10	30	180	300	150	50	8	5	10	25	50	B	S1	IP44	141	2.0

DYNAFLUX D63 SERIES WORM GEARED P.M. DC MOTORS



FLANGE MOUNTING.

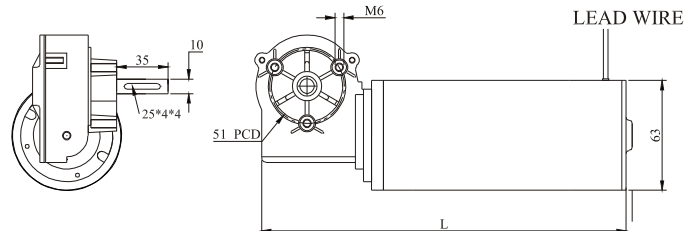

SPECIFICATIONS																						
POWER IN WATTS/HP	SPEED IN RPM	VOLTS. IN DC		CURR. IN AMP		RATIO				O/P SPEED IN RPM				TORQUE IN KG-CM				INSL. CLASS	DUTY CYCLE	PROTE. CTION	L mm	WEIGHT (KG)
		V1	V2	A1	A2	R1	R2	R3	S1	S2	S3	T1	T2	T3								
20/0.03	2000	12	24	2.1	1.0	55	27.5	18	35	70	110	19	10	8	B	S1	IP44	165	1.0			
40/0.05	2000	12	24	4.0	2.0	55	27.5	18	35	70	110	38	19	16	B	S1	IP44	165	1.4			
60/0.08	2000	12	24	6.2	3.1	55	27.5	18	35	70	110	57	30	24	B	S1	IP44	195	1.8			

NOTE - THE ABOVE GEARED MOTOR IS FLANGE MOUNTED INCASE FLANGE CUM FOOT IS REQUIRED THE SAME CAN BE GIVEN WITH EXTRA CHARGES.